




Above desk quality for home, office, hotel.


# EVoline® Dock


EVoline Dock sits above desk surface allowing maximum workspace. It's supported either by patented raising plastic mounting clamps or fixed in position by stainless steel clamps. The configurable charging and data station extends your work, private or social zone, including hotel rooms, equipped with international electrical sockets, and various multimedia, data and safety modules and switches.

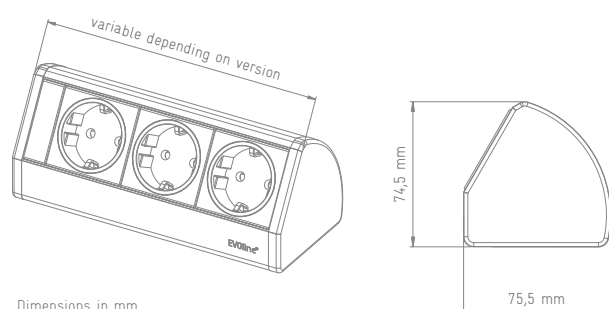

Description	Picture	Specification	Order number
<b>EVOLine Dock DESK</b> Aluminium housing, free positioning with provided slide stops. Three sockets, VDE compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with plug. Power supply cable entry in the left end cap.		silver anodised black anodised	1593 0004 0300 1593 0004 0100
<b>EVOLine Dock DESK DATA</b> Aluminium housing, free positioning with provided slide stops. Three sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 intercon- nected. Power supply cable entry in the left end cap.		silver anodised black anodised	1593 0047 8300 1593 0047 8100
<b>EVOLine Dock SMALL</b> Aluminium housing. Three sockets, VDE compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m. Power supply cable entry left side in the bottom of the profile.		Incl. one mounting clamp for table tops with 8 - 40 mm thickness  silver anodised black anodised white powder-coated (RAL 9010)  Without mounting clamp  silver anodised black anodised white powder-coated (RAL9010)	 1593 0066 6300 1593 0066 6100 1593 0066 6700   1593 0003 9300 1593 0003 9100 1593 0003 9700
<b>EVOLine Dock DATA SMALL</b> Aluminium housing, three sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 intercon- nected. Power supply cable entry on the left side in the bottom of the profile.		Incl. two mounting clamps for table tops with 8 - 40 mm thickness  silver anodised black anodised white powder-coated (RAL 9010)  Without mounting clamp  silver anodised black anodised white powder-coated (RAL9010)	 1593 0066 2300 1593 0066 2100 1593 0066 2700   1593 0047 7300 1593 0047 7100 1593 0047 7700

# EVoline® Dock

Description	Picture	Specification	Order number
<b>EVoline Dock DATA SMALL</b> Aluminium housing, three sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power supply cable entry on the left side in the bottom of the profile.		Fixing system: EVoline Quick-lock 150 mm + bracket for EVoline WireLane connection. For table tops with a thickness of 18 - 32 mm.	
		silver anodised	1593 0389 7300
		black anodised	1593 0389 7100

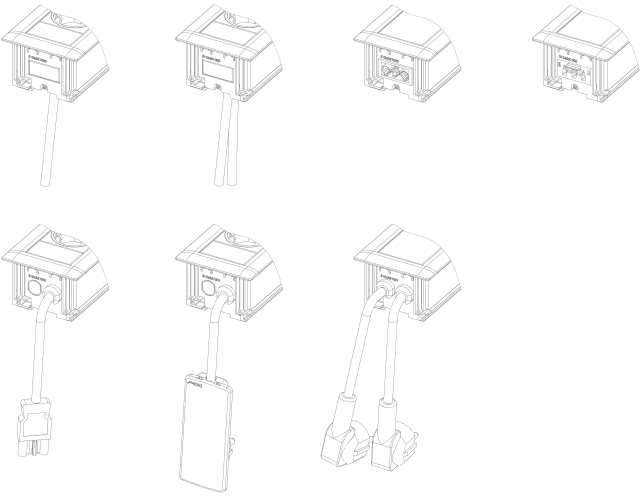

Become a co-designer and configure your very own EVoline Dock. Select from various finishes and modules for power, data, multimedia and safety as well as fixings.

Directly to  
EVoline  
Configurator.  
  
[www.evoline.com/  
konfigurator](http://www.evoline.com/konfigurator)




# EV0line® R-Dock






Contemporary and modern for all workspaces.

# EVoline® R-Dock

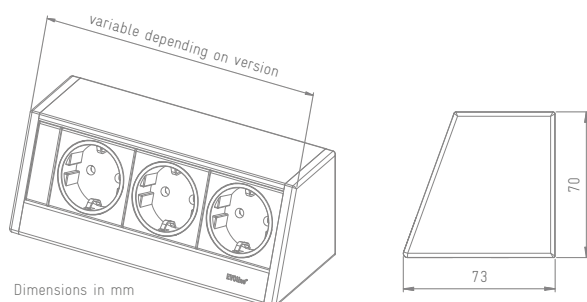EVoline R-Dock can be installed into any right angle corner. With its flat back and angled front fascia, it is comfortable to use. Install back to back on a flat surface for a double unit – obviously freely configurable.




Description	Picture	Specification	Order number
<b>EVoline R-Dock SMALL</b> Aluminium housing, three sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with plug. Power supply cable entry left side of the bottom of the profile.		silver anodised  white powder-coated (RAL 9010)  Fixing solutions to be ordered separately.	1598 0000 1700  1598 0000 8600
<b>EVoline R-Dock DATA SMALL</b> Aluminium housing, three sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power supply cable entry left side of the bottom of the profile.		silver anodised  white powder-coated (RAL 9010)  Fixing solutions to be ordered separately.	1598 0000 1800  1598 0000 8700

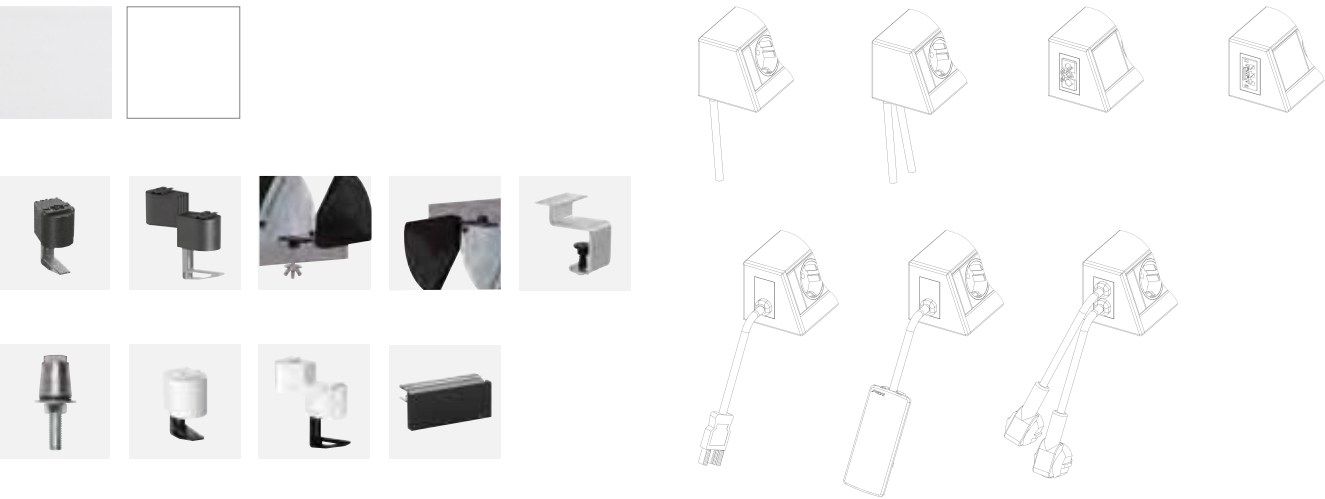

Become a co-designer and configure your very own EVoline R-Dock. Select from various finishes and modules for power, data, multimedia, safety and fixings.

Directly to  
EVoline  
Configurator.  
  
[www.evoline.com/  
konfigurator](http://www.evoline.com/konfigurator)






# EV0line® U-Dock







# EV0line® U-Dock

EV0line U-Dock can be installed in various ways in a work surface.

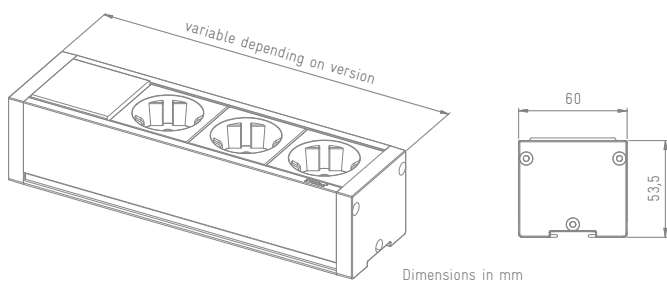As a robust base for a professional power and data supply, the freely configurable aluminium profile can be equipped with various power and data connections as well as safety modules for the protection of personnel and machinery.




Description	Picture	Specification	Order number
<b>EVoline U-Dock SMALL</b> Aluminium housing, three sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input / output in the end cap, with GST18 / 3 input plug and GST 18 / 3 output socket.		silver anodised with mounting tabs  silver anodised without mounting tabs	1596 0000 9500  1596 0000 9600
<b>EVoline U-Dock DATA SMALL</b> Aluminium housing, three sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input / output in the end cap, with GST18/3 input plug and GST18/3 output socket. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Entry for data cables in the opposite end cap.		silver anodised with mounting tabs  silver anodised without mounting tabs	1596 0000 5900  1596 0000 3300

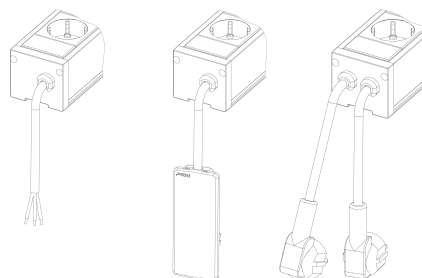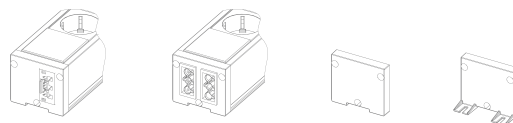

Become a co-designer and configure your very own EVoline U-Dock. Select from various finishes and modules for power, data, multimedia and safety.

Directly to  
EVoline  
Configurator.

[www.evoline.com/  
konfigurator](http://www.evoline.com/konfigurator)







# EV0line® V-Dock






Convenient.

# EV0line® V-Dock

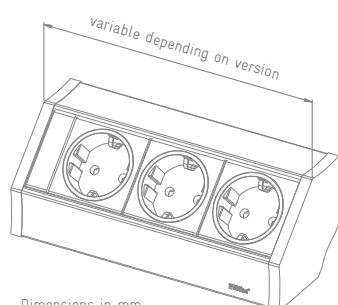With EV0line V-Dock dead corners are put to work. V-Dock can be installed horizontally or vertically and is variable in length. As additional benefit, the supply cable is concealed using the space between the back of the profile and the wall corner. Thanks to the V-Docks 45 degree alignment power and data cables are easy to connect.




Description	Picture	Specification	Order number
<p><b>EVoline V-Dock CUISINE</b></p> <p>Aluminium housing, three sockets, VDE-compliant, 0°, 16 A, contact-protected.</p> <p>Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p> <p>With profile bracket 100 mm.</p>		silver anodised	1593 6000 1300
<p><b>EVoline V-Dock DATA SMALL</b></p> <p>Aluminium housing, three sockets, VDE-compliant, 0°, 16 A, contact-protected.</p> <p>Fixed supply cable 3.0 m with plug.</p> <p>Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected.</p> <p>With two profile brackets 100 mm.</p>		silver anodised	1593 6000 2300

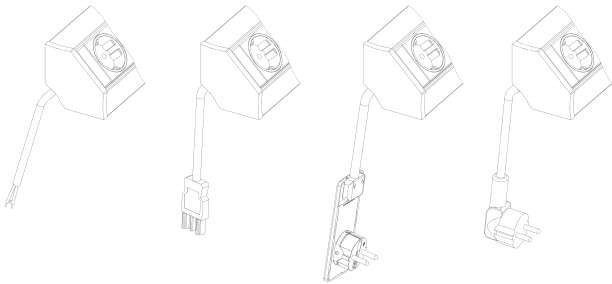

Become a co-designer and configure your very own EVoline V-Dock. Select from various finishes and modules for power, data, multimedia and safety.

Directly to  
EVoline  
Configurator.

[www.evoline.com/  
konfigurator](http://www.evoline.com/konfigurator)





# EV0line® T-Dock






# EVoline® T-Dock

A solid stainless steel pillar raises the EVoline T-Dock up above the work surface. This gives clutter free work place and creates a safe distance between power supply and potentially wet surfaces in the kitchen. In addition, the sockets are also equipped with contact protection.


## Features:

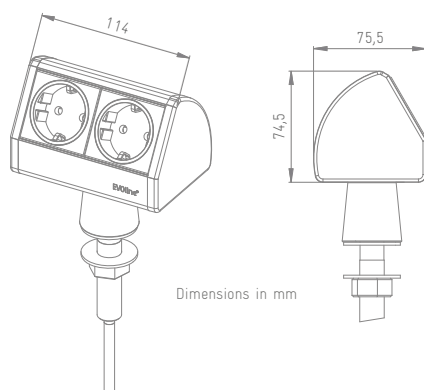The stainless steel pillar through which the power supply cable runs to below the work surface is also a high quality anti-theft device since it is firmly screwed on beneath the surface.



Description	Picture	Specification	Order number
<b>EVoline T-Dock</b> Aluminium housing in stainless steel optics, ALANOX. For mounting in work surfaces with a thickness of up to 40 mm. Two sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable with wire end ferrules, plug supplied unattached. Power supply cable entry through the pillar made of stainless steel.		black lacquered plastic end caps 1593 0220 5600  plastic end caps lacquered in stainless steel optics, ALANOX 1593 0345 5600	
<b>EVoline T-Dock mit USB Charger*</b> Aluminium housing in stainless steel optics, ALANOX. For mounting in work surfaces with a thickness of up to 40 mm. One socket, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable with wire end ferrules, plug supplied unattached. Power supply cable entry through the pillar made of stainless steel.  1x USB Type A Charger - ideal for charging of USB-chargeable devices, i.e. Apple (iPhones, iPads, iPods**), Tablets, Smart phones, MP3 Players. The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.		black lacquered plastic end caps 1593 0387 4600  plastic end caps lacquered in stainless steel optics, ALANOX 1593 0387 5600	


\*\*TM Apple Computer Inc.

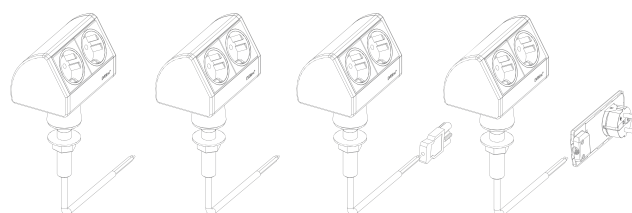

Become a co-designer and configure your very own EVoline T-Dock. Select from various modules for power and data.

Directly to  
EVoline  
Configurator.

[www.evoline.com/  
konfigurator](http://www.evoline.com/konfigurator)



# EV0line® Fixings / Accessories











# EV0line<sup>®</sup> Fixings / Accessories

There is a variety of fixings and mounting accessories available for use with EV0line connectivity systems.

Whether for a simple power and data unit or a customised individual item the available options provide secure fixing solutions with effortless installation.



Description	Picture	Specification	Order number
<b>Mounting Clamp</b> Twist-proof (includes non-slip covering) Colour: black  For profiles: Dock, U-Dock, R-Dock		<b>Mounting Clamp</b> with add-on bracket, for installation of a second EVoline Dock, twist-proof (includes non-slip covering) Colour: Black  For profiles: Dock, V-Dock, R-Dock, U-Dock	
<b>Mounting Clamp</b> Twist-proof (includes non-slip covering) Colour: white  For profiles: Dock, U-Dock, R-Dock		<b>Mounting Clamp</b> with add-on bracket, for installation of a second EVoline Dock, twist-proof (includes non-slip covering) Colour: white  For profiles: Dock, V-Dock, R-Dock, U-Dock	
<b>EVoline Stainless Steel Mounting Clamp</b> Twist-proof desk clamp for EVoline profiles Installed and secured with Allen screws.  For profiles: Dock, U-Dock, R-Dock			
<b>Mounting set for under cabinet installation</b> Consists of two EVoline Dock brackets with wood screws.  Screw size: 3,5 x 15 mm		<b>Mounting set for desk installation</b> Consisting of two Dock brackets with wing nut screws.  Screw size: M4 x 40 mm	
<b>Stainless Steel Pillar</b> High quality anti-theft device for EVoline Docks consisting of: Stainless steel sleeve, screw, nut, washer and rubber seal.  For profiles: Dock, U-Dock, R-Dock		Additional installation modules and a wide range of accessories available in our EVoline Configurator.	

Witteveen Projectinrichting  
Ouderkerk a/d Amstel  
Tel: 020 - 496 5030  
Fax: 020 - 496 3052  
info@witteveen.nl  
www.project-inrichting.nl  
www.ergonomics.nl

Directly to  
EVoline  
Configurator.

[www.evoline.com/  
konfigurator](http://www.evoline.com/konfigurator)

