









SKYFOLD®
CLASSIC
SERIES

The Classic series was developed to meet the acoustic challenges of geometrically variable spaces, from the simple (offices, classrooms) to the complex (auditoriums with sloped or stepped floors).

Exceeding industry standards, the acoustic soundproofing indexes for Classic 51, 55 and 60 ensure privacy and confidentiality are respected from one space to another. The Classic NRC model also reduces ambient noise within meeting and conference rooms, increasing the user's comfort.

coefficient (NRC/SAC) of up to 0.65 (STC 50 / RW 49)

ACOUSTIC PERFORMANCE OF INSTALLED SYSTEMS

Classic 51 _____ Exceptional soundproofing (STC 51 / RW 51)
 Classic 55 _____ Superior soundproofing (STC 55 / RW 54)
 Classic 60 _____ Maximum soundproofing (STC 60 / RW 59)
 Classic NRC ____ Excellent sound absorption with a noise reduction


CUSTOM DIMENSIONS

Width: _____ Unlimited

Height: _____ Up to 36 feet (11m)

FINISHES

Wood Veneer, Metal, Vinyl, Fabric, Plastic Laminate (Melamine), Painted, Mural, Marker Board Surface or create a custom design. (Classic NRC is available in acoustically transparent fabric only)

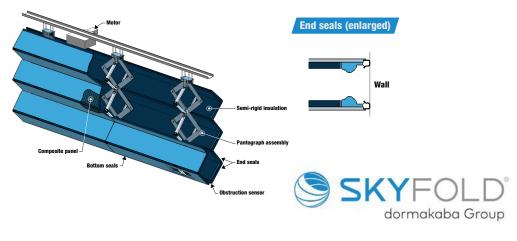



Zenith combines the vertically folding elements found in the Classic series at the top portion of the wall with a slick straight down descent thereafter.

Ideal for areas that may have wall obstructions which could limit the use of a vertically folding wall.

ACOUSTIC PERFORMANCE OF INSTALLED SYSTEMS

CUSTOM DIMENSIONS

Width: _____ Up to 48 feet (14.6m)Height: ____ Up to 12 feet (3.6m)

FINISHES

Wood Veneer, Metal, Vinyl, Fabric, Plastic Laminate (Melamine), Painted,
Mural, Marker Board Surface or create a custom design.
(Zenith 48 – Skyfold Standard Fabric, Vinyl and White Marker Board surface finishes only)
(Zenith NRC is available in acoustically transparent fabric only)





SKYFOLD ZENITH® PREMIUM SERIES

Zenith Premium series enhances the Zenith experience with seamless ceiling integration.

ACOUSTIC PERFORMANCE OF INSTALLED SYSTEMS

Zenith Premium 51 _	Exceptional soundproofing (STC 51 / RW 51)
Zenith Premium 55 _	Superior soundproofing (STC 55 / RW 54)
Zenith Premium 60	Maximum soundproofing (STC 60 / RW 59)
Zenith Premium NRC _	Excellent sound absorption with noise reduction
	coefficient (NRC/SAC) of up to 0.65 (STC 50 / RW 49)

CUSTOM DIMENSIONS

Width:	Unlimited					
Height:		Up to 14 feet (4.2m				

STANDARD FEATURES

- Pocket closure
- Two LCD display touch screens with a multilingual interface
- Faster deployment time (versus regular Zenith model)

FINISHES

Wood Veneer, Metal, Vinyl, Fabric, Plastic Laminate (Melamine), Painted, Mural, Marker Board Surface or create a custom design. (Zenith Premium NRC is available in acoustically transparent fabric only)





Mirage incorporates Skyfold technology in order to provide the user with the added luxury of transparency!

Clean lines, a lightweight structure into which a wide range of glass and plexiglass panels can be inserted, high efficiency acoustic seams, and ease of maintenance make Mirage the ideal solution for bright, sophisticated and welcoming spaces.

ACOUSTIC PERFORMANCE OF INSTALLED SYSTEM

Mirage Single laminated glass (STC 33 / RW 33)

CUSTOM DIMENSIONS

Width: _____ UnlimitedHeight: _____ Up to 24 feet (7.3m)

FINISHES

Glass available in a variety of finishes, including Plexiglass, Lexan®, Bullet-Proof Glass, Frosted Glass.



AVAILABLE OPTIONS:

DIGITAL TOUCH SCREEN

- **4.3" (110 mm) color screen**
- Multilingual interface
- Available on all models



LED LIGHTING

Available on all models except for the Mirage glass model





1 GOOD REASONS TO CHOOSE SKYFOLD®

- **O1 ACOUSTICALLY SUPERIOR:** All Skyfold walls offer soundproofing indexes above and beyond industry standards. In addition, the measurable acoustic qualities apply to the entire installed system, not just the panels!
- **O2 SIMPLE:** Electric systems that work with a keypad operation!
- **O3 SPACE:** Valuable floor space is no longer compromised as Skyfold walls retract neatly into the ceiling when not required.
- **O4 DESIGN:** Create a unique look with a wide selection of materials and finishes that can be mixed and matched, with no visible mechanisms, floor or wall tracks.
- **O5 ECONOMICAL:** Requires little manpower and minimal maintenance.
- **O6 FAST:** Skyfold lets you reconfigure a space in mere minutes.
- **O7 QUIET:** Silent operation create a banquet hall without disturbing the conference going on right next door!
- **O8 LIGHTWEIGHT:** Thanks to an ingenious structural design using less steel, Skyfold operable walls are lighter than most traditional systems.
- **O9 FLEXIBILITY:** Customized for your space, our systems adapt to all types of environments, whether large or small, simple or complex (sloped gymnasiums, stepped-floor auditoriums, stairs, etc.).
- **10 RELIABILITY:** Skyfold walls are durable and built to ensure many years of dependable operation. We stand behind our products by offering an industry leading 10 year warranty!

SKYFOLD PRODUCT LINE COMPARISON SUMMARY

	SKYFOLD CLASSIC SERIES					SKYFOLD ZENITH PREMIUM SERIES				SKYFOLD MIRAGE				
	Model 51	Model 55	Model 60	Model NRC	Model 48	Model 51	Model 55	Model 60	Model NRC	Model 51	Model 55	Model 60	Model NRC	Glass Model
TECHNICAL (IMPERIAL)														
STC (System)	51	55	60	50	48	51	55	60	50	51	55	60	50	33
STC (Panel)	61	61	66	60	57	61	61	66	60	61	61	66	60	36(5)
NRC (System)	-	-	-	Up to 0.65	-	-	-	-	Up to 0.65	-	-	-	Up to 0.65	-
Max Height (ft.)	36	36	28	36	12	12	12	12	12	14	14	14	14	24
Max Length (ft.)	Unlimited	Unlimited	Unlimited	Unlimited	48	48	48	48	48	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
Weight (lbs/sq.ft.)	7	7.6	9.4	7.5	6	6.2	6.8	8.6	6.5	6.2	6.8	8.6	6.5	7.5
Available Finishes	Various ⁽¹⁾	Various ⁽¹⁾	Various ⁽¹⁾	Fabric only ⁽⁴⁾	Limited (3)	Various ⁽¹⁾	Various ⁽¹⁾	Various ⁽¹⁾	Fabric only ⁽⁴⁾	Various ⁽¹⁾	Various ⁽¹⁾	Various(1)	Fabric only ⁽⁴⁾	Various ⁽²⁾
Ceiling space required for storage (ft.) - (approx.)	2'-0" to 6'- 4"	2'-0" to 6'- 4"	2'-0" to 5'-0"	2'-0" to 6'-4"	2'-0" to 2'-8.25"	2'-0" to 2'-8.25"	2'-0" to 2'-8.25"	2'-0" to 2'-8.25"	2'-0" to 2'-8.25"	2'-0" to 2'-10"	2'-0" to 2'-10"	2'-0" to 2'-10"	2'-0" to 2'-10"	3'-2" to 4'-9"
Pocket Width (ft.) - (approx.)	55" to 69"	55" to 69"	55" to 69"	55" to 69"	55" to 63.5"	55" to 63.5"	55" to 63.5"	55" to 63.5"	55" to 63.5"	56.25" to 70"	56.25" to 70"	56.25" to 70"	56.25" to 70"	44" to 61"
TECHNICAL (METRIC)														
RW (System)	51	54	59	49	47	51	54	59	49	51	54	59	49	33
RW (Panel)	60	60	64	58	55	60	60	64	58	60	60	64	58	36 ⁽⁵⁾
SAC (System)	-	-	-	Up to 0.65	-	-	-	-	Up to 0.65	-	-	-	Up to 0.65	-
Max Height (mm)	11,000	11,000	8,535	11,000	3,660	3,660	3,660	3,660	3,660	4,265	4,265	4,265	4,265	7,315
Max Length (mm)	Unlimited	Unlimited	Unlimited	Unlimited	14,600	14,600	14,600	14,600	14,600	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
Weight (kg/m²)	34.2	37.1	46	36.6	29.3	30.4	33.3	42	32.8	30.4	33.3	42	32.8	36.6
Available Finishes	Various ⁽¹⁾	Various ⁽¹⁾	Various ⁽¹⁾	Fabric only ⁽⁴⁾	Limited (3)	Various(1)	Various ⁽¹⁾	Various ⁽¹⁾	Fabric only ⁽⁴⁾	Various ⁽¹⁾	Various ⁽¹⁾	Various(1)	Fabric only ⁽⁴⁾	Various ⁽²⁾
Ceiling space required for storage (mm) - (approx.)	615 to 1,960	615 to 1,960	615 to 1,530	615 to 1,960	615 to 820	615 to 820	615 to 820	615 to 820	615 to 820	615 to 865	615 to 865	615 to 865	615 to 865	965 to 1,450
Pocket Width (mm) - (approx.)	1,400 to 1,750	1,400 to 1,750	1,400 to 1,750	1,400 to 1,750	1,400 to 1,615	1,400 to 1,615	1,400 to 1,615	1,400 to 1,615	1,400 to 1,615	1,430 to 1,780	1,430 to 1,780	1,430 to 1,780	1,430 to 1,780	1,105 to 1,550
ADDITIONAL FEATURES														
Auto-reverse	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ
Floor track	N	N	N	N	N	N	N	N	N	N	N	N	N	N
Wall tracks	N	N	N	N	N	N	N	N	N	N	N	N	N	Y
Obstruction Safety Sensor	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Y	Υ	Υ	Υ	N
Infrared Sensor	N	N	N	N	N	N	N	N	N	N	N	N	N	Y
Back-Up Operation	Υ	Υ	Υ	Υ	Y	Υ	Υ	Υ	Υ	Y	Υ	Υ	Υ	Y
Pocket Closure	N	N	N	N	N	N	N	N	N	Y	Υ	Υ	Υ	N
AVAILABLE OPTIONS														

Please note that certain figures listed above were approximated for comparison purposes only.


10-year parts warranty

Digital Touch Screen

LED Lighting

For specific and complete technical information, REVIT Drawings and drawing details, please visit our website.

- (1) Finishes must not exceed 1/8" thick (3mm) or weigh more than 0.11 lbs/sq.ft. (0.54 kg./m²)
- (2) Please refer to the technical section of our website for available finishes
- (3) Available finishes include standard vinyl/fabric or white marker board surface finish
- (4) Available in acoustically transparent fabric only
- (5) Single laminated glass



SKYFOLD DEPLOYMENT TIME REQUIRED COMPARED TO CONVENTIONAL OPERABLE WALLS


Υ

Included

Included

Included

Υ



Included

SKYFOLD PRODUCT LINE **COMPARISON SUMMARY**

SKYFOLD'S EXCLUSIVE LINE OF VERTICALLY FOLDING OPERABLE WALL SYSTEMS PROVIDE A UNIQUE WAY TO SUBDIVIDE SPACE. OUR CUSTOM BUILT SYSTEMS ARE COMPLETELY AUTOMATIC AND RETRACT INTO A CEILING CAVITY WITH A SIMPLE KEYPAD OPERATION.

CLASSIC SERIES

State-of-the-art acoustics for privacy and soundproofing

ZENITH SERIES

Cutting-edge, innovative vertical wall technology

ZENITH PREMIUM SERIES

Enhances the Zenith experience!

/ MIRAGE

Brings in the light with your choice of transparent panels

Skyfold is pleased to be an official member of the U.S. Green Building Council. The Green Council is committed to promoting better designed buildings that are not only more environmentally and socially responsible, but also help improve the quality of life for those who occupy them and the communities in which they are built. The Council has developed a benchmarking system known as LEED (Leadership in Energy & Environmental Design). When it comes to recycled materials, architects and owners who choose a Skyfold vertically folding operable wall system can calculate the following toward LEED accreditation on their projects.

In order to continue protecting our environment, it is essential that we all do our part by using recycled materials whenever possible. Skyfold is proud to help



Recycled materials Post-consumer Pre-consumer

Up to 97% Up to 27% Up to 51%



SKYFOLD® LIMITED WARRANTY

WORKMANSHIP: Parts & labour - 2 years or 5,000 cycles* Optional extended warranty on parts available - 10 years or 5,000 cycles* Acoustical Performance - 10 years

*First occurrence from date of shipment.

Digital touch screen excluded from extended warranty.

SKYFOLD®, SKYFOLD® Classic™, SKYFOLD Zenith® and SKYFOLD Mirage® are registered trademarks of Skyfold Inc. and Skyfold Investments Ltd.

For more information visit our website or contact us directly.

MAIN OFFICE 325 Lee Avenue Montreal, Quebec T +1 (514) 457-4767 F +1 (514) 457-7111 info@skyfold.com

CANADA H9X 3S3

www.skyfold.com



Witteveen Projectinrichting Ouderkerk a/d Amstel Tel: 020 - 496 5030 info@witteveen.nl www.scheidingswand.net www.project-inrichting.nl

